

Best Bubbles Aerosol

Refrigerant Gas Leak Detector in Aerosol Can



Description

Best Bubbles is the leak detector developed by Errecom to quickly identify refrigerant micro-leaks on refrigerant lines and AC/R components.

Best Bubbles Aerosol must be used while the system is running or is under pressure and can also be applied on pipes with extreme temperatures from -40°C to +80°C, guaranteeing a sure and visible result.

Thanks to its foaming formulation, Best Bubbles Aerosol perfectly adheres to surfaces allowing the technician to immediately detect leaks through the formation of large and thick bubbles.

The aerosol can version makes it possible to constantly deliver the product at precise points to better highlight micro-leaks.

The product can be used even upside down thanks to the special 360° valve. Also available with directional dispensing trigger.

Field of Application


- HVAC/R
- Automotive

Features

- Easy to use
- Quick and sure result
- Ready to use
- Operating temperature from -40°C to +80°C
- Excellent adhesion power to surfaces
- Can be used even upside down thanks to the special 360° valve

Instructions

1. Shake the aerosol can.
2. Spray the product onto the area to be checked while the system is running.
3. Wait for the foam to adhere to the treated surface.
4. Refrigerant gas leaks result in the formation of large, thick bubbles.
5. Remove the product from the surface using a soft cloth.
6. Proceed to repair the detected leak.

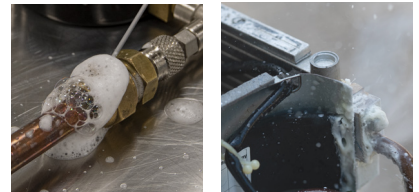

Physical and Chemical Properties

Property	Value
Aspect	Clear liquid
Colour	White
Odour	Odourless
Relative density	1,0 ± 0,005 g/ml (at T = 20°C)

Categorisation and Labelling

This technical specification is only applicable when it comes with the current Safety Data Sheet.
In accordance with legal requirements, only the Safety Data Sheet contains current safety information.
The MSDS is available on request.

Safety Instructions

Avoid contact with skin and eyes, inhalation of vapours and mists.
Contaminated clothing should be changed before entering eating areas.
Do not eat or drink while working.

Storage Instructions

Store at below 20 °C. Keep away from flame and heat sources. Store away from direct sunlight.
Keep away from food, drink and feed.

Transport Conditions

UN1950 – FLAMMABLE AEROSOLS, Class 2.1 (LIMITED QUANTITY)

Shelf life

5 years from the production date.

Packaging

Art.-Nr.	Description		
AB1232.N.01	Best Bubbles Aerosol	12	1404
AB1232.N.01.C	Best Bubbles Aerosol (A)	12	1404

Hazard Statements



Danger

Hazard statements: H222, H229 Extremely flammable aerosol. Pressurized container: may burst if heated.

Precautionary statements: P210 Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. P211 Do not spray on an open flame or other ignition source. P251 Do not pierce or burn, even after use. P410+P412 Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122°F.